


LED solutions designed to signal gardens and pedestrian areas, with a design that embellishes and delimits the outdoor spaces.

Features

Columns built in extruded aluminium, painted for the outdoors, LED and system incorporated.

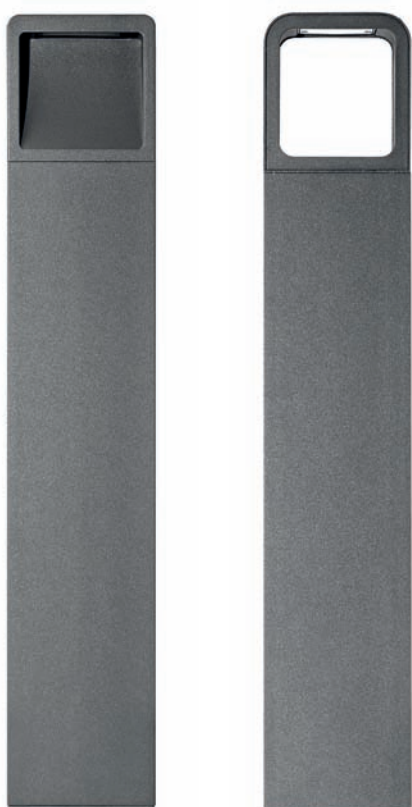

Power

LED 5,4W, 6,3W

Colour temperature

3000K warm white - CRI \geq 80

4000K neutral white - CRI \geq 80

Nominal lumen output

5,4W - 265lm, 6,3W - 254lm

Control gear

Electronic (EL)

IP - IK

IP54, IK08

Finishes

Anthracite [22]


Supply voltage

220... 240V, 50/60Hz


Installation

Floor

Features




LED



■
5,4W
265 lm
3000K **11.7600.0032.22**
4000K **11.7600.0042.22**

Lamp LED and control gear included

LED



■
6,3W
254 lm
3000K **11.7600.0031.22**
4000K **11.7600.0041.22**

Lamp LED and control gear included

