


Great installation versatility on different types of ceilings, the range of luminaires for LEDs are characterised by high yields and the possibility of choosing from a variety of models and optical depending on the desired appearance and visual comfort.

Body built in white-painted steel. Minimum body height 57mm. Optical unit consisting of a high purity aluminium reflector prismatic polycarbonate diffuser (UGR < 19). Several formats: 600x600, 1200x300 and 1200x600.

Installation:

They adapt to most conventional roofs, both framed and smooth non-modular ones and thanks to embedment frames (accessories)

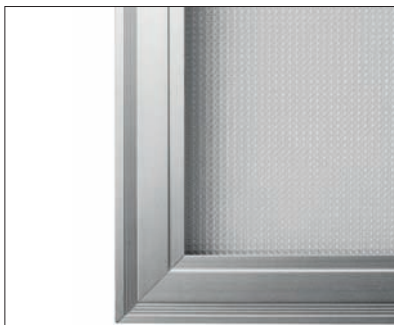

Panel LED - Polycarbonat diffuser (UGR<19)

Power

LED 36W, 74W

Beam

120°

Colour temperature

3000K warm white - CRI ≥ 80

4000K neutral white - CRI ≥ 80

Nominal lumen output

LED 36W - 3900 lm, 74W - 7800 lm

Control gear

Electronic (EL)

Electronic Dimmer (ELD)

Electronic Dimmer Dali (ELDD)

Electronic Dimmer Dali (ELDD) + Emergency

IP

IP44/20

Finishes

White (33)

Supply voltage

220... 230V, 50/60Hz



Installation

Recessed ceiling


Accessories

accessory for installation on surface

Features



15mm. visible profile



25mm. visible profile


Possibility of doing other versions on request:
Emergency

LED

UGR <19

Polycarbonat diffuser

LED and control gear included



36W
120°
Profile 600x600
Control gear EL
3900 lm
3000K **40/LU383/33**
4000K **40/LU384/33**



36W
120°
Profile 600x600
Control gear ELD
3900 lm
3000K **40/LU383D/33**
4000K **40/LU384D/33**



36W
120°
Profile 600x600
Control gear ELDD
3900 lm
3000K **40/LU383DD/33**
4000K **40/LU384DD/33**

36W
120°
Profile 600x600
Control gear EL +
emergency
3900 lm
3000K **40/LU383E/33**
4000K **40/LU384E/33**

36W
120°
Profile 600x600
Control gear ELD +
emergency
3900 lm
3000K **40/LU383ED/33**
4000K **40/LU384ED/33**


36W
120°
Profile 600x600
Control gear ELDD + emer-
gency
3900 lm
3000K **40/LU383EDD/33**
4000K **40/LU384EDD/33**

LED

UGR <19

Polycarbonat diffuser

LED and control gear included



36W
120°
Profile 300x1200
Control gear EL
3900lm
3000K **40/LU483/33**
4000K **40/LU484/33**



36W
120°
Profile 300x1200
Control gear ELD
3900lm
3000K **40/LU483D/33**
4000K **40/LU484D/33**




36W
120°
Profile 300x1200
Control gear ELDD
3900lm
3000K **40/LU483DD/33**
4000K **40/LU484DD/33**

LED

UGR <19

Polycarbonat diffuser

LED and control gear included

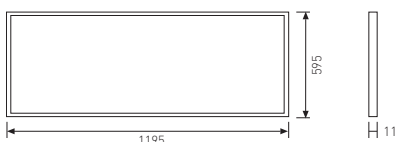

36W
120°
Profile 600x1200
Control gear EL
3900lm
3000K **40/LU583/33**
4000K **40/LU584/33**



36W
120°
Profile 600x1200
Control gear ELD
3900lm
3000K **40/LU583D/33**
4000K **40/LU584D/33**



36W
120°
Profile 600x1200
Control gear ELDD
3900lm
3000K **40/LU583DD/33**
4000K **40/LU584DD/33**

Accessories



accessory for installation on surface
600x600
11.1615.0001.33



accessory for installation on surface
300x1200
11.1615.0002.33




accessory for installation on surface
600x1200
11.1615.0003.33




accessory for installation on suspended
40/L/S/21


Adapter frame to install visible profile
luminaire to a smooth non-modular.



Drill 610 x 610
007/6060



Drill 1210 x 310
007/12030



Drill 1210 x 610
007/12060

