


Recessed small downlight LED aimed at a professional public that requires quality lighting and the maximum energetic saving. Specially designed to meet the lighting requirements of hotels, commercial buildings and other commercial spaces that require small luminaires.

#### Features:

Downlight built with a plastic body and aluminium heat sink. Fixed and adjustable versions.

High-quality aluminium reflectors. The front elements, available as accessories, are held by magnets, which can easily replace such items and makes installation easier. Latest-generation LED and incorporated electronic system.

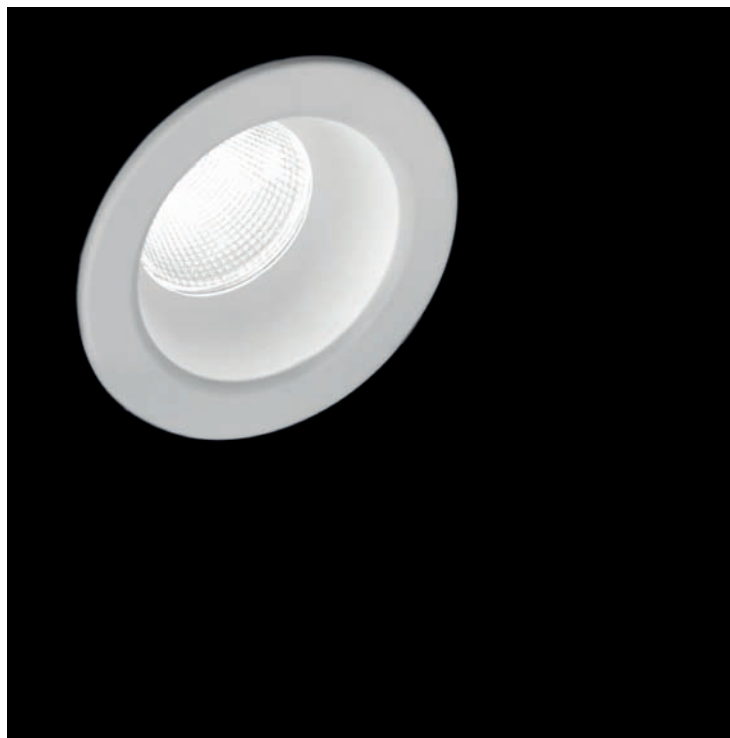

#### Power

LED 10W, 15W

#### Beam

LED 10W 15°, 24°, 40°

LED 15W 15°, 24°, 40°

#### Colour temperature

3000K warm white - CRI  $\geq$  80

4000K neutral white - CRI  $\geq$  80

#### Nominal lumen output

10W - 700 lm, 15W - 1300 lm

#### Control gear

Electronic (EL)

#### IP

IP20 / 44

#### Finishes

White (33)


#### Supply voltage

220... 240V, 50/60Hz

#### Installation

Recessed ceiling

Features



Versions:


Electronic Dimmer (ELD) on request  
 Electronic Dimmer Dali (ELDD) on request

Pinhole FIXED


LED

Luminaire to complete with available accessories

**LED and control gear included**



□	□	□
10W	10W	10W
15°	24°	40°
drill-hole Ø75	drill-hole Ø75	drill-hole Ø75
control gear EL	control gear EL	control gear EL
700 lm	700 lm	700 lm
3000K <b>11.1547.0301.33</b>	3000K <b>11.1547.0302.33</b>	3000K <b>11.1547.0304.33</b>
4000K <b>11.1547.0401.33</b>	4000K <b>11.1547.0402.33</b>	4000K <b>11.1547.0404.33</b>




15W	15W	15W
15°	24°	40°
drill-hole Ø95	drill-hole Ø95	drill-hole Ø95
control gear EL	control gear EL	control gear EL
1300 lm	1300 lm	1300 lm
3000K <b>11.1547.5301.33</b>	3000K <b>11.1547.5302.33</b>	3000K <b>11.1547.5304.33</b>
4000K <b>11.1547.5401.33</b>	4000K <b>11.1547.5402.33</b>	4000K <b>11.1547.5404.33</b>

Pinhole ORIENTABLE



LED

Luminaire to complete with available accessories

**LED and control gear included**



□	□	□
10W	10W	10W
15°	24°	40°
drill-hole Ø75	drill-hole Ø75	drill-hole Ø75
control gear EL	control gear EL	control gear EL
700 lm	700 lm	700 lm
3000K <b>11.1547.0311.33</b>	3000K <b>11.1547.0312.33</b>	3000K <b>11.1547.0314.33</b>
4000K <b>11.1547.0411.33</b>	4000K <b>11.1547.0412.33</b>	4000K <b>11.1547.0414.33</b>



15W	15W	15W
15°	24°	40°
drill-hole Ø95	drill-hole Ø95	drill-hole Ø95
control gear EL	control gear EL	control gear EL
1300 lm	1300 lm	1300 lm
3000K <b>11.1547.5311.33</b>	3000K <b>11.1547.5312.33</b>	3000K <b>11.1547.5314.33</b>
4000K <b>11.1547.5411.33</b>	4000K <b>11.1547.5412.33</b>	4000K <b>11.1547.5414.33</b>

.04 .33

Decorative Trims



■ □  
10W **11.1547.0001**  
15W **11.1547.5001**  
Fixed



■ □  
10W **11.1547.0002**  
15W **11.1547.5002**  
Fixed / Orientable



■ □  
10W **11.1547.0006**  
15W **11.1547.5006**  
Fixed / Orientable  
SQUARE



■ □  
10W **11.1547.0003**  
15W **11.1547.5003**  
Orientable



■ □  
10W **11.1547.0004**  
15W **11.1547.5004**  
Fixed / Orientable



■ □  
10W **11.1547.0007**  
15W **11.1547.5007**  
Fixed / Orientable  
SQUARE



■ □  
10W **11.1547.0005**  
15W **11.1547.5005**  
Fixed / Orientable

Reference options

11.1547.0342.33



11.1547.



0- 10W  
5- 15W



3- 3000K  
4- 4000K



0- On/Off, Fixed  
1- On/Off, Orientable  
2- Dim 1-10V, Fixed  
3- Dim 1-10V, Orientable  
4- Dali, Fixed  
5- Dali, Orientable



1- 15°  
2- 24°  
3- 40°

.33

