


Versatility of installation in various types of ceilings, the luminaire range has high performance and a wide choice of models and reflectors for looks and visual comfort.

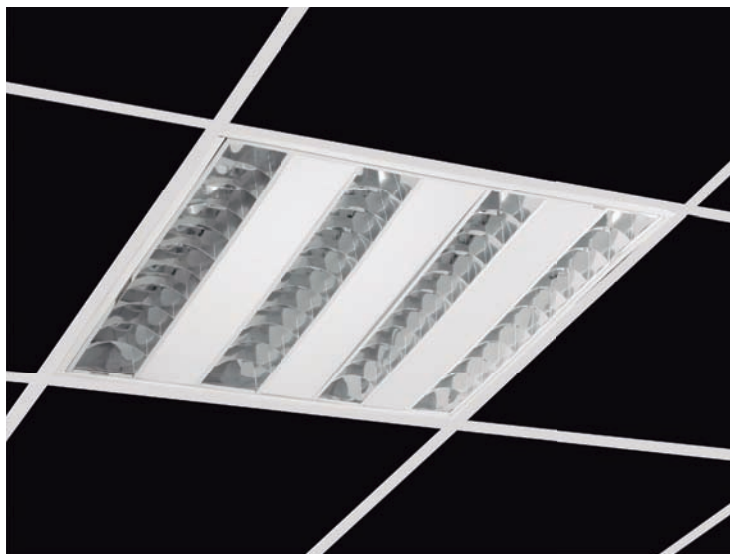

**Power**

LED 36W, 40W, 72W

**Beam**

72° Profile - Versatile

100° Versatile

**Colour temperature**

3000K warm white - CRI  $\geq$  80

4000K neutral white - CRI  $\geq$  80

**Nominal lumen output**

LED 36W - 5280 lm, 40W - 5150 lm, 72W - 10000 lm

**Control gear**

Electronic (EL)

Electronic Dimmer (ELD)

Electronic Dimmer Dali (ELDD)

**IP**

IP20 - IP44/20

**Finishes**

White (33)

**Supply voltage**

220... 240V, 50/60Hz

**Installation**


Recessed ceiling

**Accessories**


Frame, ceiling adaptor

Profile

Steel housing, painted white. Minimum height of housing 57 mm. Optical system made of prismatic or high aluminium reflector and texturized polycarbonate diffuser. Different formats: 600x600 or 300x1200. Adapts to most conventional ceilings, both modular and smooth non-modular.



15mm. visible profile




25mm. visible profile


Features



Óptica brillo lama plana mate  
LED and control gear included




□ 36W 72° Profile 600x600 Control gear EL 5280 lm 3000K <b>731L/4883/33</b> 4000K <b>731L/4884/33</b>	□ 36W 72° Profile 600x600 Control gear ELD 5280 lm 3000K <b>731L/4883D/33</b> 4000K <b>731L/4884D/33</b>	□ 36W 72° Profile 600x600 Control gear ELDD 5280 lm 3000K <b>731L/4883DD/33</b> 4000K <b>731L/4884DD/33</b>
--	---	--



L= 1196

□ 36W 72° Profile 300x1200 Control gear EL 5280 lm 3000K <b>731L/5883/33</b> 4000K <b>731L/5884/33</b>	□ 36W 72° Profile 300x1200 Control gear ELD 5280 lm 3000K <b>731L/5883D/33</b> 4000K <b>731L/5884D/33</b>	□ 36W 72° Profile 300x1200 Control gear ELDD 5280 lm 3000K <b>731L/5883DD/33</b> 4000K <b>731L/5884DD/33</b>
---	--	---





L=1196


□ 72W 72° Profile 600x1200 Control gear EL 10000 lm 3000K <b>731L/6883/33</b> 4000K <b>731L/6884/33</b>	□ 72W 72° Profile 600x1200 Control gear ELD 10000 lm 3000K <b>731L/6883D/33</b> 4000K <b>731L/6884D/33</b>	□ 72W 72° Profile 600x1200 Control gear ELDD 10000 lm 3000K <b>731L/6883DD/33</b> 4000K <b>731L/6884DD/33</b>
--	---	--



Double parabolic louver specular  
LED and control gear included




□ 36W 72° Profile 600x600 Control gear EL 5280 lm 3000K <b>731L/4883U/33</b> 4000K <b>731L/4884U/33</b>	□ 36W 72° Profile 600x600 Control gear ELD 5280 lm 3000K <b>731L/4883DU/33</b> 4000K <b>731L/4884DU/33</b>	□ 36W 72° Profile 600x600 Control gear ELDD 5280 lm 3000K <b>731L/4883DDU/33</b> 4000K <b>731L/4884DDU/33</b>
--	---	--



L= 1196

□ 36W 72° Profile 300x1200 Control gear EL 5280 lm 3000K <b>731L/5883U/33</b> 4000K <b>731L/5884U/33</b>	□ 36W 72° Profile 300x1200 Control gear ELD 5280 lm 3000K <b>731L/5883DU/33</b> 4000K <b>731L/5884DU/33</b>	□ 36W 72° Profile 300x1200 Control gear ELDD 5280 lm 3000K <b>731L/5883DDU/33</b> 4000K <b>731L/5884DDU/33</b>
---	--	---



L=1196

□ 72W 72° Profile 600x1200 Control gear EL 10000 lm 3000K <b>731L/6883U/33</b> 4000K <b>731L/6884U/33</b>	□ 72W 72° Profile 600x1200 Control gear ELD 10000 lm 3000K <b>731L/6883DU/33</b> 4000K <b>731L/6884DU/33</b>	□ 72W 72° Profile 600x1200 Control gear ELDD 10000 lm 3000K <b>731L/6883DDU/33</b> 4000K <b>731L/6884DDU/33</b>
--	---	--

Features





Profile



Prismatic diffuser

LED and control gear included




□	□	□
40W 100° Profile 600x600 Control gear EL 5150 lm/m 3000K <b>73L2/4883/33</b> 4000K <b>73L2/4884/33</b>	40W 100° Profile 600x600 Control gear ELD 5150 lm/m 3000K <b>73L2/4883D/33</b> 4000K <b>73L2/4884D/33</b>	40W 100° Profile 600x600 Control gear ELDD 5150 lm/m 3000K <b>73L2/4883DD/33</b> 4000K <b>73L2/4884DD/33</b>


Accessories

Adapter frame to install visible profile luminaire to a smooth non-modular.


Drill 610 x 610  
**007/6060**



Drill 1210 x 310  
**007/12030**




Drill 1210 x 610  
**007/12060**



Versatile

Steel housing, painted white. Minimum height of housing 57 mm. Choice of optical systems as required. Adapts to most conventional ceilings, both modular and smooth non-modular.

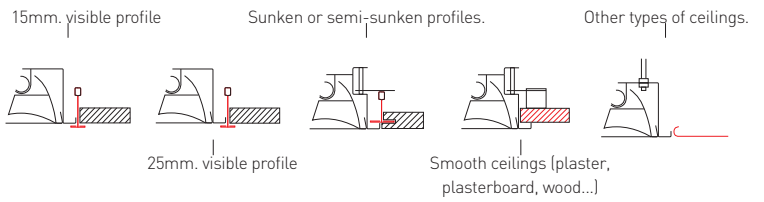


Features




Installation clamps / Anchors (unincorporated)


LED



Double parabolic louver  
LED and control gear included



36W 72° Drill 585x585 Control gear EL 5280 lm 3000K <b>731L/4883P/33</b> 4000K <b>731L/4884P/33</b>	36W 72° Drill 585x585 Control gear ELD 5280 lm 3000K <b>731L/4883DP/33</b> 4000K <b>731L/4884DP/33</b>	36W 72° Drill 585x585 Control gear ELDD 5280 lm 3000K <b>731L/4883DDP/33</b> 4000K <b>731L/4884DDP/33</b>
---	--	---



L= 1196

36W 72° Drill 296x1196 Control gear EL 5280 lm 3000K <b>731L/5883P/33</b> 4000K <b>731L/5884P/33</b>	36W 72° Drill 296x1196 Control gear ELD 5280 lm 3000K <b>731L/5883DP/33</b> 4000K <b>731L/5884DP/33</b>	36W 72° Drill 296x1196 Control gear ELDD 5280 lm 3000K <b>731L/5883DDP/33</b> 4000K <b>731L/5884DDP/33</b>
--	---	--



L=1196


72W 72° Drill 585x1196 Control gear EL 10000 lm 3000K <b>731L/6883P/33</b> 4000K <b>731L/6884P/33</b>	72W 72° Drill 585x1196 Control gear ELD 10000 lm 3000K <b>731L/6883DP/33</b> 4000K <b>731L/6884DP/33</b>	72W 72° Drill 585x1196 Control gear ELDD 10000 lm 3000K <b>731L/6883DDP/33</b> 4000K <b>731L/6884DDP/33</b>
---	--	---

LED


UGR <19



Double parabolic louver  
LED and control gear included




36W 72° Drill 585x585 Control gear EL 5280 lm 3000K <b>731L/4883PU/33</b> 4000K <b>731L/4884PU/33</b>	36W 72° Drill 585x585 Control gear ELD 5280 lm 3000K <b>731L/4883DPU/33</b> 4000K <b>731L/4884DPU/33</b>	36W 72° Drill 585x585 Control gear ELDD 5280 lm 3000K <b>731L/4883DDPU/33</b> 4000K <b>731L/4884DDPU/33</b>
---	--	---



L= 1196

36W 72° Drill 296x1196 Control gear EL 5280 lm 3000K <b>731L/5883PU/33</b> 4000K <b>731L/5884PU/33</b>	36W 72° Drill 296x1196 Control gear ELD 5280 lm 3000K <b>731L/5883DPU/33</b> 4000K <b>731L/5884DPU/33</b>	36W 72° Drill 296x1196 Control gear ELDD 5280 lm 3000K <b>731L/5883DDPU/33</b> 4000K <b>731L/5884DDPU/33</b>
--	---	--



L=1196

72W 72° Drill 585x1196 Control gear EL 10000 lm 3000K <b>731L/6883PU/33</b> 4000K <b>731L/6884PU/33</b>	72W 72° Drill 585x1196 Control gear ELD 10000 lm 3000K <b>731L/6883DPU/33</b> 4000K <b>731L/6884DPU/33</b>	72W 72° Drill 585x1196 Control gear ELDD 10000 lm 3000K <b>731L/6883DDPU/33</b> 4000K <b>731L/6884DDPU/33</b>
---	--	---

Ceiling



**11T5**  
Ceiling adaptor.  
4 units included.