


Injection moulding polycarbonate, machined and anodised in silver grey.

Two models:

- Fixed to ceilings/walls.
- Hanging from the ceiling.

Concept

The Riddle range has a very special design. Following a close observation of Nature, the idea of reproducing the light and shadow of sunlight filtering through leaves was created.

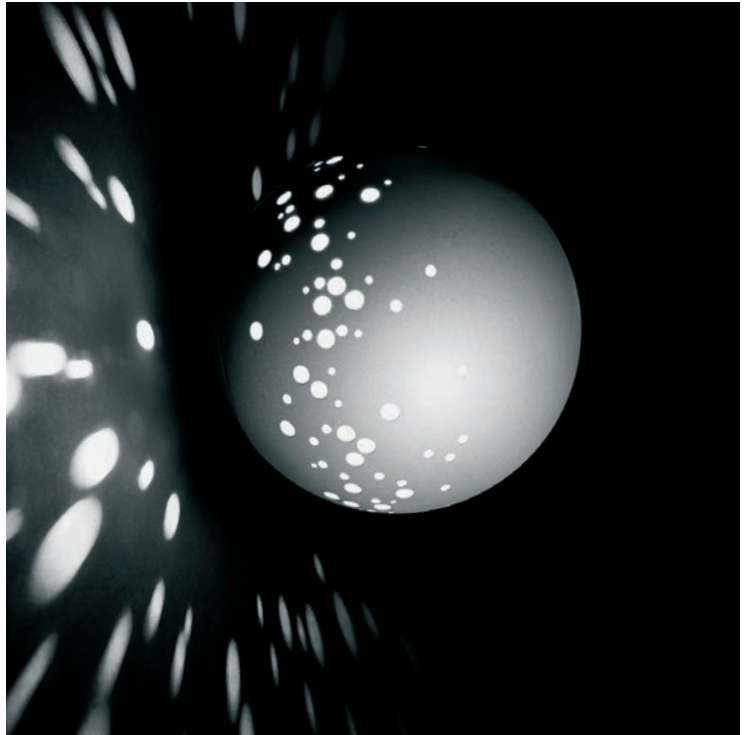

Power

LED 8W
HIT-TC 20W
QT-14 max.60W
QT-32 100W

Colour temperature

3000K warm white - CRI \geq 80

Control gear

Electronic (EL)

IP - IK

IP65 - IK08

Finishes

Grey [21]

Supply voltage

220... 240V, 50/60Hz


Installation

wall, ceiling, suspended

Accessori


Hanging

Features



Finishes

LED



8W
3000K **11.6603.0001.21**

LED and control gear included



PG J5 **HIT-TC**



20W
3000K **6603/20/21**



G9 **QT-14**



60W
6603/60/21

Lamp and control gear included



PG J5 **HIT-TC**



20W
3000K **6604/20/21**



G9 **QT-14**




max. 60W
6604/60/21

Lamp and control gear included



G12 **HIT**



70W
6600S/70/21



E 27 **QT-32**



100W
6600S/100/21

Control gear included

Accessories

Hanging



For ref: 6604/20, 6604/60
20/6604/21