


Luminaires for lamps LED. Designed to light work areas such as offices or traffic zones, where no false ceilings can be opened.

Features:

Surface-mounted luminaires. Steel housing, painted white. Optical block comprising a glossy anodised aluminium reflector, a matt anodised slat and a textured polycarbonate diffuser. Different formats: 600x600 o 300x1200. Mounted on the ceiling. Version UGR < 19.

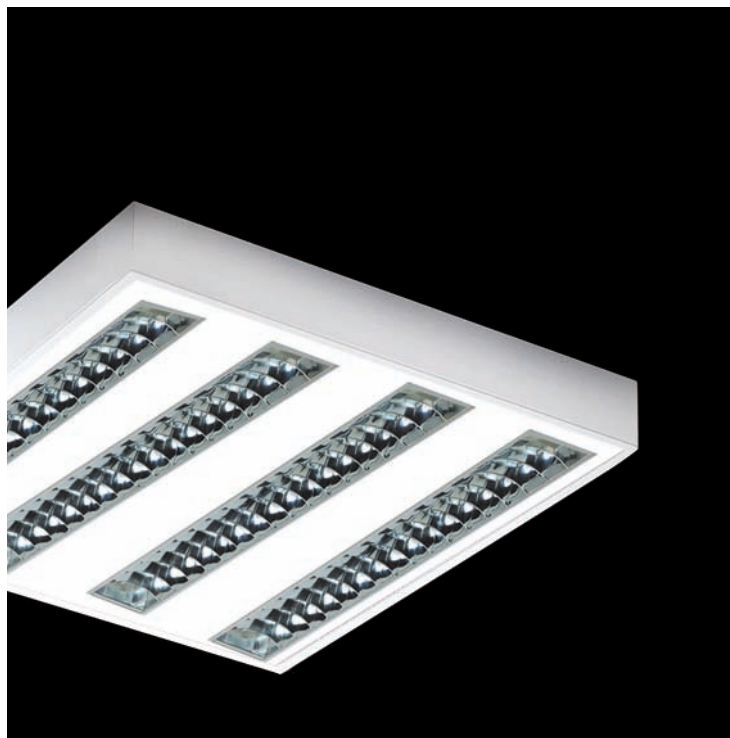

Power

LED 36W

Beam

74°

Colour temperature

3000K warm white - CRI ≥ 80
4000K neutral white - CRI ≥ 80

Nominal lumen output

36W - 5280 lm

Control gear

Electronic (EL)
Electronic Dimmer (ELD)
Electronic Dimmer Dali (ELDD)

IP

IP20

Finishes

White (33)

Supply voltage

220... 240V, 50/60Hz

Installation

Surface



Features



LED


Glossy optics
Plain matt slat

LED and control gear included



L=600

□	□	□
36W 74°	36W 74°	36W 74°
600x600	600x600	600x600
Control gear EL 5280 lm	Control gear ELD 5280 lm	Control gear ELDD 5280 lm
3000K 431L/4883/33	3000K 431L/4883D/33	3000K 431L/4883DD/33
4000K 431L/4884/33	4000K 431L/4884D/33	4000K 431L/4884DD/33





L=1200

□	□	□
36W 74°	36W 74°	36W 74°
300x1200	300x1200	300x1200
Control gear EL 5280 lm	Control gear ELD 5280 lm	Control gear ELDD 5280 lm
3000K 431L/5883/33	3000K 431L/5883D/33	3000K 431L/5883DD/33
4000K 431L/5884/33	4000K 431L/5884D/33	4000K 431L/5884DD/33

UGR


<19

Glossy optics
Double parabolic louver



L=600

□	□	□
36W 74°	36W 74°	36W 74°
600x600	600x600	600x600
Control gear EL 5280 lm	Control gear ELD 5280 lm	Control gear ELDD 5280 lm
3000K 431L/4883U/33	3000K 431L/4883DU/33	3000K 431L/4883DDU/33
4000K 431L/4884U/33	4000K 431L/4884DU/33	4000K 431L/4884DDU/33



L=1200

□	□	□
36W 74°	36W 74°	36W 74°
300x1200	300x1200	300x1200
Control gear EL 5280 lm	Control gear ELD 5280 lm	Control gear ELDD 5280 lm
3000K 431L/5883U/33	3000K 431L/5883DU/33	3000K 431L/5883DDU/33
4000K 431L/5884U/33	4000K 431L/5884DU/33	4000K 431L/5884DDU/33